


BEZILLO[®]

SUPERIOR QUALITY PRODUCTS.

PROSHIELD HIDRO 180

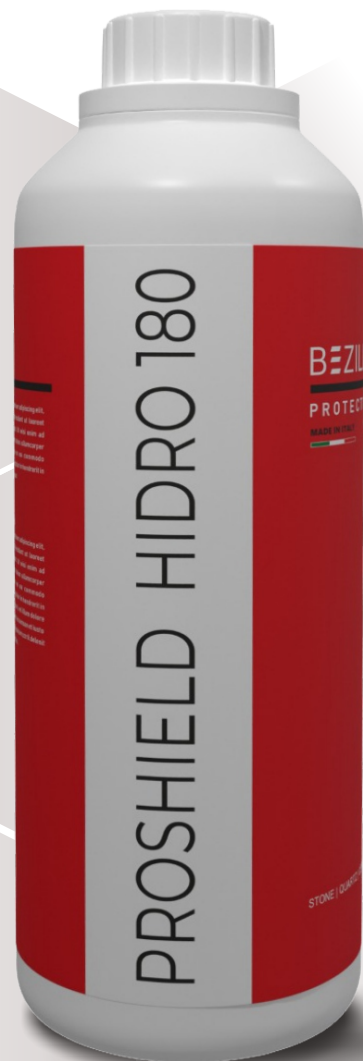

 **BETON[®]**
EXPERIENCE THE DIFFERENCE!!

BEZILLO PROSHIELD HIDRO 180

PRODUCT DESCRIPTION

It penetrates the surface of the stone creating an invisible barrier protection against stains: - Oil, Grease, Coffee, Tea, Food, General Dirt, Mould and Mildew. Product will not change the natural aspect of the stone or create any type of film, allowing permeability vapour moisture to escape, and is UV- resistant. Some natural stones (marble, limestone) will remain sensitive to acidic etching, we recommend any spillage be cleaned up as a matter of good housekeeping.







APPLICATION

All stone surfaces to be treated must be completely clean and dry. Where no previous treatment experience exists a small discreet area should be tested to verify the suitability of the product to the stone.

Apply one coat of HIDRO evenly by spraying using a low pressure pump up garden spray type unit or with a lamb's wool applicator or by cloth in circular movements. The most efficient method is by spraying. On very absorbent surfaces apply a second or third coat allowing sufficient time between each application (20-30 minutes) to penetrate into the stone and dry. If in doubt test discreet area to ensure second or third application is necessary.

In case of over treatment or any air bubbles remove by wiping excess product using a clean cotton cloth or absorbent paper. Temperature of surface to be treated should not be below 10°C. Avoid direct sunlight especially for external works.

ADVANTAGES

-  Superior quality water based penetrating sealer
-  Effectively seals and protects all natural stones, engineered quartz etc
-  Ready to use
-  Does not alter the natural look of the stone surface
-  Non-carcinogenic
-  Used by professionals

DISCLAIMER

This information is true and accurate to the best of our knowledge and belief, but since the circumstances of use and any labour required are out of our control, the end user must verify beforehand that the product is appropriate for his particular application. No responsibility can be accepted, and no warranty can be provided by our Representatives, Agents, or Distributors. The end user should make sure he has read our most recent material and that the products are sold in accordance with our Standard Conditions of Sale.



BEZILLO PROSHIELD HIDRO 180

TECHNICAL DATA SHEET

RECOMMENDED USE

Polished and honed matt textured finish marble terrazzo, granite, marble, natural and artificial engineered stones, terra cotta, quarry, cement pavers.

- Natural finish for interior and exterior use
- Effective for honed and polished natural stones - Flooring –Work surfaces (Kitchen, Bathrooms)
- Effective as pre- grouting treatment

DRYING TIME

Dry 2 to 3 hours, safe to walk on carefully. Fully effective within 48-72 hours before resuming normal use.

PACKAGING

- 10 x 1 litre bottles
- 2 x 5 litre container
- 25 litre container

All childproof tamper evident cap

IMPORTANT SAFETY NOTE

When using any type of product suitable ventilation should be provided during and after application. Use appropriate rubber gloves where necessary and do not smoke, eat or drink while using product. Keep product well closed and out of the reach from children. Additional information available on Material Safety Data Sheet.



BEZILLO PROSHIELD HIDRO 180

TECHNICAL DATA SHEET

COVERAGE PER LT

Indicative coverage allowing 2 coats subject to stone absorption, surface texture.

- High Porosity Stone, Sandstone 3 – 5m²
- Medium Porosity, Honed Stone, Limestone 6 – 10m²
- Low Porosity, Polished Stone 10 – 20m²
- Very Dense Stone 25 – 30m²

PRE GROUT TREATMENT

Product can be applied while stone is damp. Apply over clean stone or tile surface minimum 3 hours before grouting. Final stone protection can be carried out with water based treatment later once stone clean and dry.

WARRANTY

The technical advice whether verbal or in writing or by way of trials are given in good faith but without warranty. The application use or processing of the products are beyond our control and should be tested for their suitability and therefore your own responsibility. In no event shall BETON STONE SOLUTIONS be liable to the customer or anyone else for incidental or consequential damages, however occasioned. **ALWAYS TEST FIRST**

STORAGE

Keep product in cool and dry surroundings.





EXPERIENCE THE DIFFERENCE!!

BETON STONE SOLUTIONS INDIA PVT LTD

+91 99301 28291 / +91 83286 36546

info@betonstonesolutions.com | www.betonstonesolutions.com

HEAD OFFICE - INDIA

B/2, Amrat Niwas, 15th
Sarojini Road, Ville Parle
(W), Mumbai - 400056, India.

REGIONAL OFFICE - INDIA

Plot No.18, Saibabanagar
Colony, Tellapur, R.C. Puram,
Sangareddy, Hyderabad, India.

ITALY OFFICE

Via Monte Cengio,
11/0 36073, Cornedo
Vicentino (VI) Italy.

DUBAI OFFICE

P.O. Box
239697,
Dubai UAE.