


# BEZILLO<sup>®</sup>

SUPERIOR QUALITY PRODUCTS.

## PROSHIELD DELUXE 702

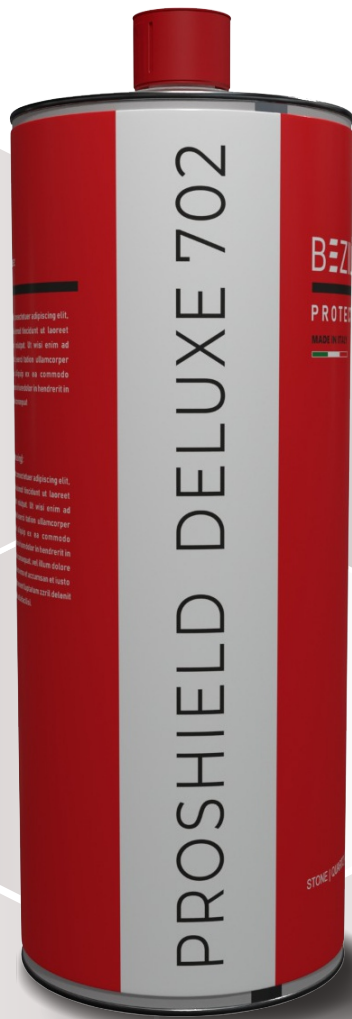

# BEZILLO PROSHIELD DELUXE 702

## PRODUCT DESCRIPTION

DELUXE 702 penetrates the surface of the stone creating an invisible barrier against moisture and rising humidity & protection against stains: Oil, Grease, Coffee, Tea, Food, General Dirt, Mould and Mildew. Product will not change the natural aspect of the stone or create any type of film, allowing permeability vapour moisture to escape, and is UV- resistant. Some natural stones (marble, limestone) will remain sensitive to acidic etching, we recommend any spillage be cleaned up as a matter of good housekeeping.

### DELUXE 702

is made with an odorless solvent and is suitable for internal uses. Food Contact Certification: the product is certificated to be used on kitchen worktops and bathroom tops.

## PACKAGING

- 10 x 1 litre
- 2 x 5 litre container
- 25 litre container

All childproof tamper evident cap

## RECOMMENDED USE

Suitable for all honed, polished granite, marble, natural and artificial engineered stones, terra cotta, porcelain, quarry, cement pavers.

- Effective for Flooring –Work surfaces (Kitchen, Bathrooms) Showers and areas in constant contact with water.
- Effective prevention of efflorescence humidity, shadow marks and yellow stains caused by Iron oxidation.

## ADVANTAGES



... Superior quality solvent based penetrating sealer



... Effectively seals and protects all natural stones, engineered quartz etc



... Ready to use




... Does not alter the natural look of the stone surface



... Used by professionals

## DISCLAIMER

This information is true and accurate to the best of our knowledge and belief, but since the circumstances of use and any labour required are out of our control, the end user must verify beforehand that the product is appropriate for his particular application. No responsibility can be accepted, and no warranty can be provided by our Representatives, Agents, or Distributors. The end user should make sure he has read our most recent material and that the products are sold in accordance with our Standard Conditions of Sale.

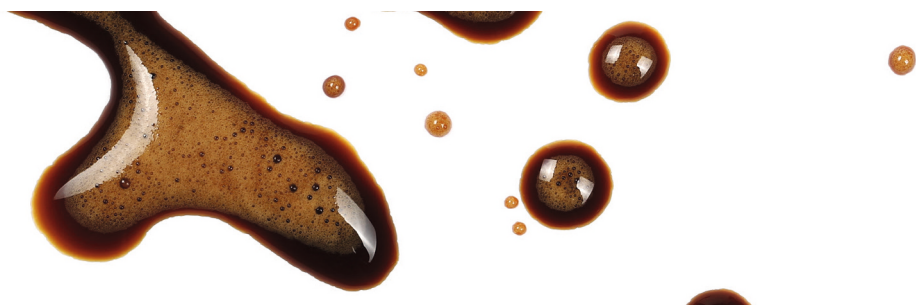

# BEZILLO PROSHIELD DELUXE 702

## TECHNICAL DATA SHEET

### APPLICATION

All stone surfaces to be treated must be completely clean and dry. Where no previous treatment experience exists a small discreet area should be tested to verify the suitability of the product to the stone. Where necessary ensure all surrounding areas and surfaces sensitive to solvents are protected against any spillage. Apply one coat of Deluxe evenly by spraying using a low pressure pump up garden spray type unit or with a lamb's wool applicator or by cloth in circular movements. The most efficient method is by spraying. On very absorbent surfaces apply a second coat allowing sufficient time for your first application to penetrate into the stone and dry. If in doubt test discreet area to ensure second application is necessary. In case of over treatment or any air bubbles remove by wiping excess product using a clean cotton cloth or absorbent paper. On large floor areas excess residue of product can be buffed

off my machine using a white nylon type pad. Temperature of surface to be treated should not be below 10°C. Avoid direct sunlight especially for external works.

### DRYING TIME

Dry within 2 to 3 hours and safe to walk on carefully. Fully effective within 48-72 hours before resuming normal use.

### IMPORTANT SAFETY NOTE

When using any type of solvent based product suitable ventilation should be provided during and after application. Use appropriate rubber gloves where necessary and do not smoke, eat or drink while using product. Keep product well closed and out of the reach from children. Additional information available on the MSDS SHEET (Material Safety Data Sheet).



# BEZILLO PROSHIELD DELUXE 702

## TECHNICAL DATA SHEET

### COVERAGE PER LT

Indicative coverage allowing 1 coats subject to stone absorption, surface texture.

- High Porosity Stone, Sandstone 8 – 10m<sup>2</sup>
- Medium Porosity, Honed Stone, Limestone 10 – 16m<sup>2</sup>
- Low Porosity, Polished Stone 16 – 20m<sup>2</sup>
- Very Dense Stone 20 – 30m<sup>2</sup>

### STORAGE

Keep product in cool and dry surroundings.

### WARRANTY

The technical advice whether verbal or in writing or by way of trials are given in good faith but without warranty.

The application use or processing of the products are beyond our control and should be tested for their suitability and therefore your own responsibility.

In no event shall BETON STONE SOLUTIONS be liable to the customer or anyone else for incidental or consequential damages, however occasioned. **ALWAYS TEST FIRST**





EXPERIENCE THE DIFFERENCE!!

**BETON STONE SOLUTIONS INDIA PVT LTD**

+91 99301 28291 / +91 83286 36546

[info@betonstonesolutions.com](mailto:info@betonstonesolutions.com) | [www.betonstonesolutions.com](http://www.betonstonesolutions.com)

**HEAD OFFICE - INDIA**

B/2, Amrat Niwas, 15th  
Sarojini Road, Ville Parle  
(W), Mumbai - 400056, India.

**REGIONAL OFFICE - INDIA**

Plot No.18, Saibabanagar  
Colony, Tellapur, R.C. Puram,  
Sangareddy, Hyderabad, India.

**ITALY OFFICE**

Via Monte Cengio,  
11/0 36073, Cornedo  
Vicentino (VI) Italy.

**DUBAI OFFICE**

P.O. Box  
239697,  
Dubai UAE.